



NOTES:

1. MAXIMUM MOUNTING TORQUE = 4in.lbs.
2. HARDWARE IS INCLUDED.
3. THIS IS A LEAD FREE PRODUCT.
4. MAX REFLOW IS 245°C FOR 5 SEC.

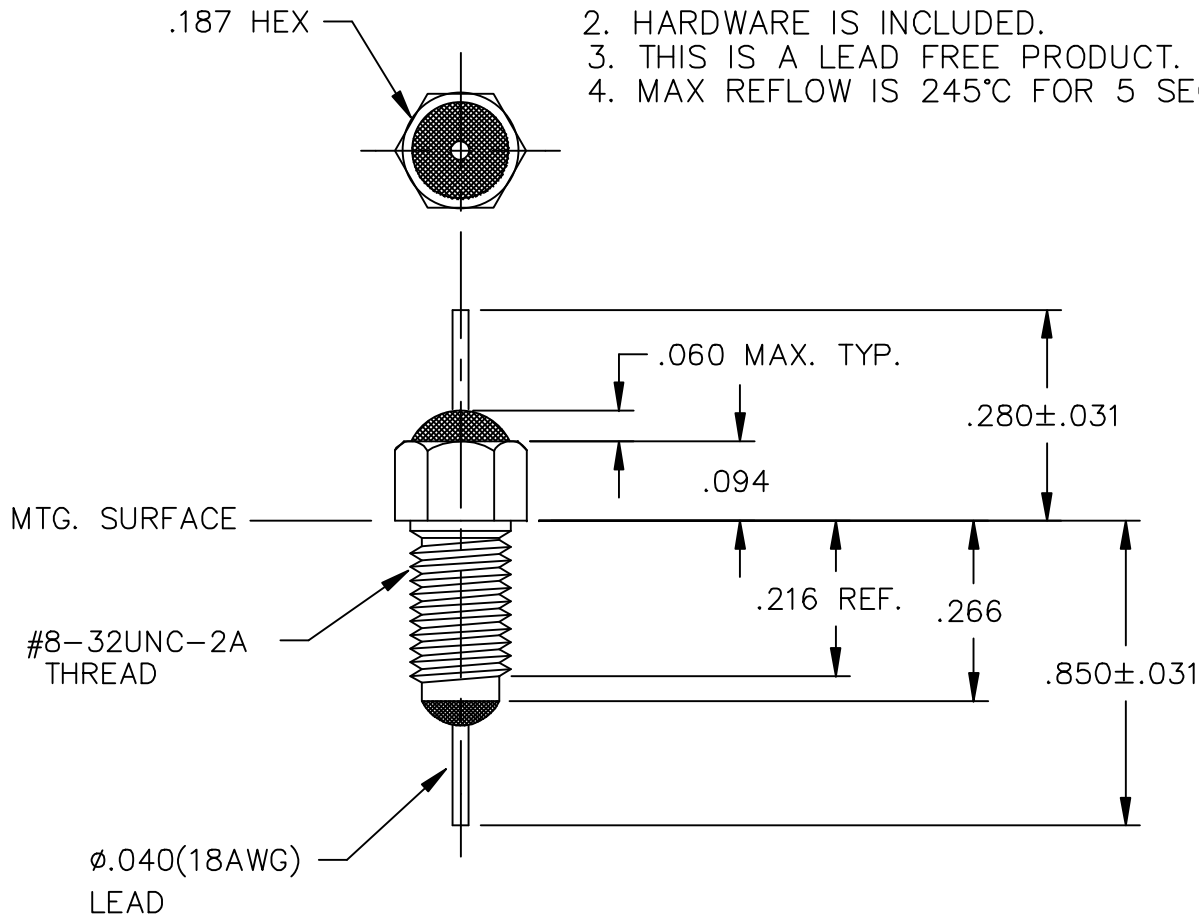

LEAD FINISH: SILVER	
BUSHING FINISH: SILVER	
CAPACITANCE	22nF GMV
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	85°C 100 VDC MAX. 125°C 100 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
1	7
10	27
100	43
1 GHz	60
10 GHz	60

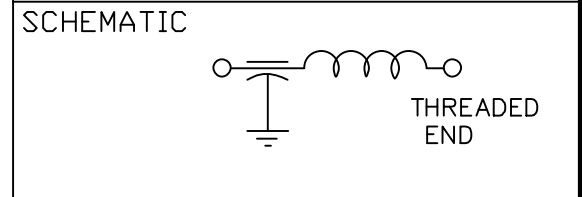

MARKING:
 PART: ●S712003
 BAG:
 SCI 51F-712-003
 DATE CODE
 LOT NO.
 QTY/BAG (100 MAX.)

	00	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 SPECTRUM CONTROL INC.	ERIE, FAIRVIEW PENNSYLVANIA	
	CN. 18996-CPD	CHANGE NOTICE	Fractions ± 1/64 Dec. .xx± Dec. .xxx±.010 Angles ±0° 30'		Dwn. KNOWLTON	Description FEED THRU RESIN SEAL FILTER
			CODE IDENT. NO. QLSP2	Ckd. 05/07/05	Apvd.	51F712-003
				Scale NONE		

